



## MOUSSOL®-APS LV Premium 1/3 F-15 #6471



### ALCOHOL RESISTANT AFFF FOAM CONCENTRATE


### Performance

#### Technical Specification

Appearance	yellow/yellowish can be stored in the originally sealed container or in suitable storage containers [F12] at temperatures not below the specified frost resistance and not above 50°C.
Fire Class/es	B
Lowest Use Temperature	-15 [°C]
Max. Storage Temperature	max. +50 [°C]
Specific Gravity (20°C)	1,060 ± 0,02 [g/ml]
pH value (20°C)	6,5 - 8,5
Viscosity (20°C)	< 15 [mm²/sec]
Sedimentation	Sediment Free

#### Foam Properties acc. to EN1568 at 20°C

Induction Rate	1% or 3%
Expansion Rate	6 - 10
25% Drainage Time	1 - 5 [min]
50% Drainage Time	3 - 7 [min]
Expansion Types	Low Expansion Foam

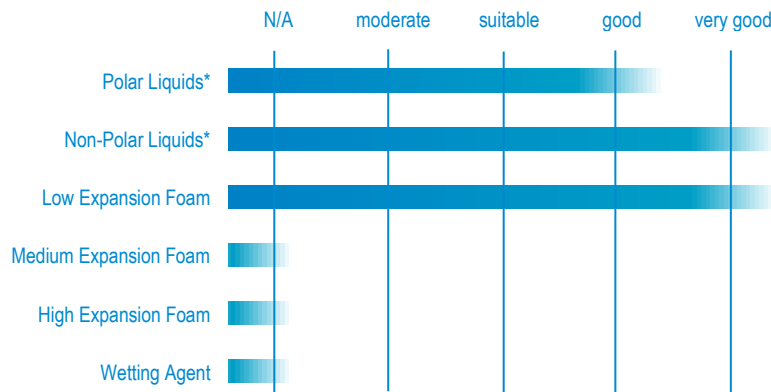

\*as mentioned in the respective test standard or in the text

#### Performance Tests

- DIN EN 1568** EN 1568:2008 - Approval-No.: KB-268/14  
Part 3 (Heptane): IA/IA  
Part 4 (Acetone): IC/IC --- (IPA): IB/IC
- ICAO Airport Services Manual** Low Expansion Foam --- Level B
- IMO MSC.1/Circ. 1312 non-polar (Heptane)**  
IMO MSC.1/Circ. 1312 polar (Alcohol)
- LAST fire** good --- good --- good

## Application

## Compatibility

## Storage & Shelf Life

## Environment

## Transport



For further Documentation please scan the Qr code or see <http://sthamer.de/qr/6471>



Safety Advice: Please bear in mind that foam solutions are electroconductive liquids. The use in proximity to electrical/electrical equipment can require specific safety measures.



Safety Advice: Please see our Technical Information regarding "Mixing of Foam Concentrates" for further information

### Disclaimer:

Any information in this product data sheet bases upon our best knowledge and expertise at the time of this issue. We reserve the right to change the content of this document or adopt to newer information. Please ask for the most recent revision of this data sheet.

<b>Main Office Hamburg</b> Liebigstr. 5 22113 Hamburg GERMANY Tel.: +49 (0)40 73 61 68-0 Fax: +49 (0)40 73 61 68-60	<b>Sales Office Hannover</b> Hartenbrakenstr. 54 30659 Hannover GERMANY Tel.: +49 (0)511 768 358-45 Fax: +49 (0)511 768 358-46	<b>Sales Office Jena</b> Carl-Pulfrich-Str. 1 07745 Jena GERMANY Tel.: +49 (0)3641 63538-57 Fax: +49 (0)3641 63538-59	<b>Office Frankenthal</b> Siemensstr. 4 67227 Frankenthal GERMANY Tel.: +49 (0)6233 3796-605 Fax: +49 (0)6233 3796-622	<a href="mailto:info@sthamer.com">info@sthamer.com</a> <a href="http://www.sthamer.com">www.sthamer.com</a>	
--	---	--	---	--	--